

T-LOCK


Quick Coupler

The T-Lock model is a dedicated coupler, “built in” into the beam of the bucket to not overly modify the kinematic system. It's available in mechanic and hydraulic version. It's reversible for coupling front/back of the bucket. It's available in three size for excavators from 1.2 to 16 t. observing specific dimensions of bucket adapter.

The hydraulic version is equipped with a cylinder **H** that moves the closing lever **G** which couples onto pin **P2**. At the same time, safety hook **S** locks pin **P1** **automatically**, ensuring total locking.

T-LOCK = COMPLETE SAFETY

- a) cylinder **H** is equipped with a block valve to prevent the release of the equipment
- b) safety hook **S** to avoid the fall of the equipment in case of breakdown
- c) two safety springs **M** push on lever **G** should there be an hydraulic fault.

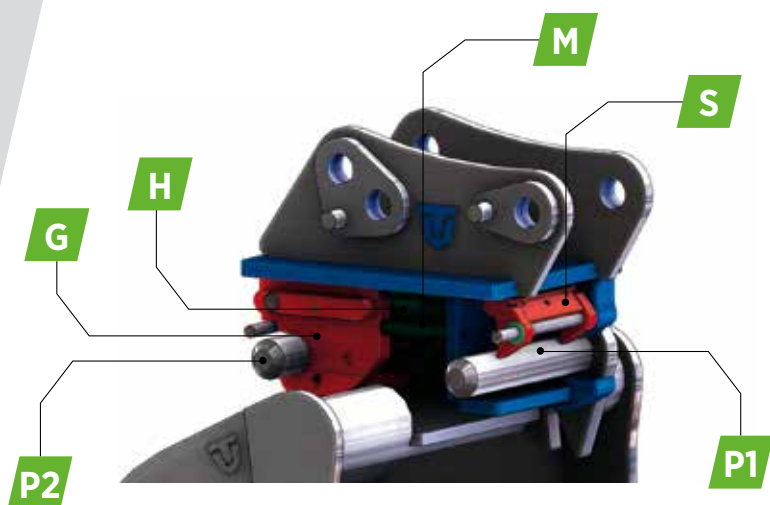

Code	Class	Model	 t.	 kg.
YMM030	T.20-T.30	ARMTV03	1,2 : 3,9	30 - 40
YIM030	T.20-T.30	ARITV03	1,2 : 3,9	35 - 45
YMM050	T.35-T.50	ARMTV10	4 : 12,5	60 - 85
YIM050	T.35-T.50	ARITV10	4 : 12,5	65 - 90
YIM065	T.50-T.55	ARITV18	9,5 : 16	170 - 210