



serie **FR**



1

Ganasce con profilo studiato per facilitare la pulizia del materiale al suolo.

Jaws and frame spikes for better ground material selection.

Mâchoires avec profil étudié pour faciliter le nettoyage du matériel au sol.

Mandíbulas con perfil diseñado para facilitar la limpieza del material en el suelo.

Zangen mit einem Profil, das die Reinigung von Material am Boden erleichtert.

2

Inserti anti-usura saldati per proteggere la struttura.

Welded wear-resistant inserts for higher protection.

Inserts anti-usures soudés pour protéger la structure.

Insertos anti desgaste para proteger el cuerpo.

Verschweißte, verschleißfeste Einsätze zum Schutz der Struktur.

3

Area di frantumazione ganaschia e telaio aumentata per favorire penetrazione e produttività.

Increased jaw and frame crushing area to improve penetration and productivity.

Domaine de broyage mâchoire et châssis augmenté pour faciliter pénétration et productivité.

Área de trituración de mandíbula y bastidor aumentada para facilitar la penetración y productividad.

Vergrößerte Zerkleinerungszangen- und Rahmenfläche für höhere Durchdringung und gesteigerte Produktivität.

4

Struttura rinforzata e profilo aggressivo.

HD body and aggressive shape.

Structure renforcée et profil agressif.

Estructura reforzada y perfil agresivo.

Verstärkte Struktur und aggressives Profil.

5



Nuovo sistema denti HD intercambiabili.

New interchangeable HD Teeth system.

Nouveau système des dents interchangeables HD.

Nuevo sistema de dientes HD intercambiables.

Neues System, austauschbare Zähne HD.

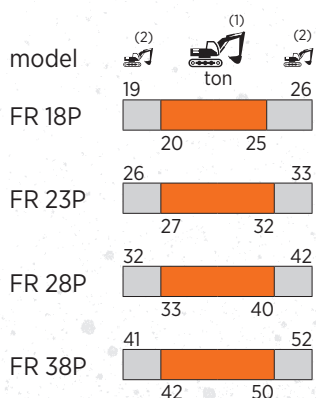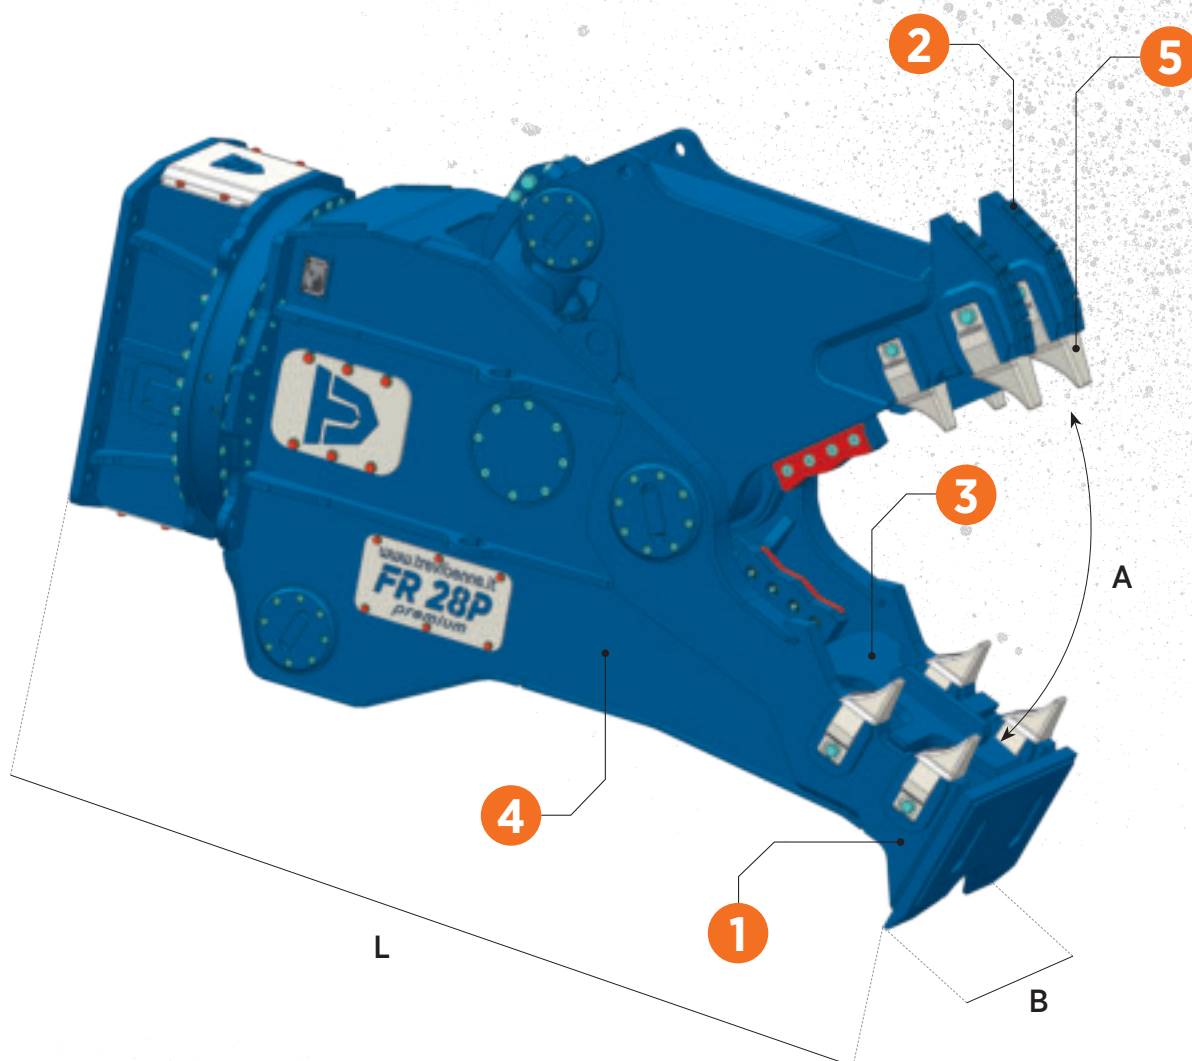

- (1)** Accoppiamento escavatore-attrezzatura ottimale
Optimum excavator-equipment combination
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
- (2)** Accoppiamento escavatore-attrezzatura possibile
Possible excavator-equipment combination
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination

		FR 18P	FR 23P	FR 28P	FR 38P
	kg.	2.075	2.625	3.175	3.910
A	mm.	685	885	825	1.040
B	mm.	530	550	600	685
L	mm.	2.110	2.450	2.470	2.610
	mm.	220	260	260	260
	mm.	40	45	50	60
	bar	250	250	250	250
	l/min.	130 / 200	180 / 250	230 / 300	250 / 300
	bar	140	140	140	140
	l/min.	20 / 40*	20 / 40*	25 / 50*	25 / 50*

* Doppio motore / * Double motor / * Double moteur / * Doble motor / * Doppelmotor

