



serie F



1

Due denti di penetrazione frontali intercambiabili per lavoro secondario a terra.

Two interchangeable front penetration teeth for secondary ground work.

Deux dents de pénétration frontales interchangeables pour le travail secondaire au sol.

Dos dientes de penetración frontales intercambiables para trabajo de suelo secundario.

Zwei Front austauschbare Durchdringungszähne für sekundäre Bodenbearbeitung.

2

Aumentata resistenza del telaio e della ganaschia mobile nei punti di maggior usura.

Increased resistance of the frame and the movable jaw in the points of greatest wear.

Résistance du châssis et de la mâchoire mobile augmentée aux points de plus forte usure.

Mayor resistencia del bastidor y de la garra móvil en los puntos de mayor desgaste.

Erhöhte Festigkeit des Rahmens und der beweglichen Zangen in Bereichen mit größtem Verschleiß.

3

Profilo specifico per la riduzione a terra del calcestruzzo e la separazione del tondino di armatura.




Specific profile for downsizing concrete and separating it from rebar.

Profil spécifique pour la réduction du béton au sol et la séparation des barres d'armature.

Perfil específico para la reducción del hormigón al suelo y la separación de la varilla de refuerzo.

Spezielles Profil für die Reduzierung des Betons auf den Boden und die Trennung der Bewehrungsstange.



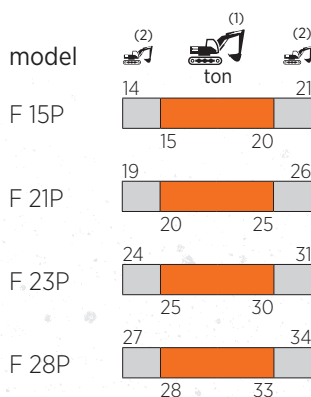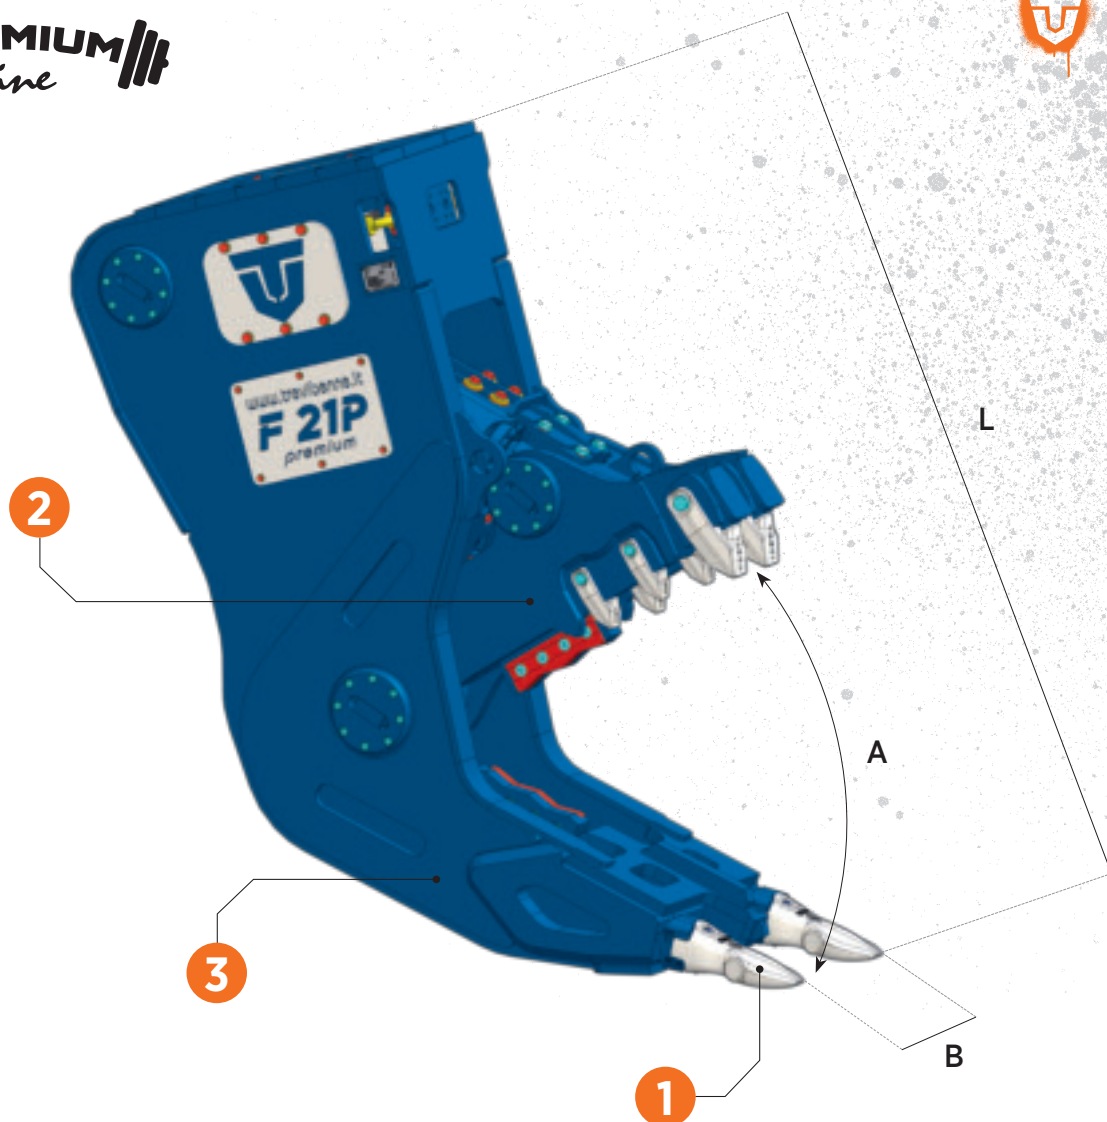

- (1) Accoppiamento escavatore-attrezzatura ottimale
Optimum excavator-equipment combination
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
- (2) Accoppiamento escavatore-attrezzatura possibile
Possible excavator-equipment combination
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination

		F 15P	F 21P	F 23P*	F 28P	F 32P*	F 33P	F 38P*
	kg.	1.380	2.070	2.520	2.680	3.300	3.750	4.200
A	mm.	670	835	835	890	890	980	980
B	mm.	460	540	540	670	670	700	700
L	mm.	1.820	2.135	2.535	2.300	2.710	2.600	2.805
	mm.	220	260	260	260	260	260	260
	mm.	40	45	45	55	55	60	60
	bar	250	250	250	250	250	250	250
	l/min.	130 / 200	180 / 250	180 / 250	230 / 300	230 / 300	250 / 350	250 / 350
	bar	/	/	140	/	140	/	140
	l/min.	/	/	20 / 40**	/	20 / 40**	/	20 / 40**

* Modello fornito con rotazione idraulica continua / * Model equipped with continuous hydraulic rotation / * Modèle équipé de rotation hydraulique en continu / * Modelo entregado con rotación hidráulica continua / * Modell mit kontinuierlicher hydraulischer Rotation ausgestattet

** Doppio motore / ** Double motor / ** Double moteur / ** Doble motor / ** Doppelmotor