



serie **HC**



1

Sistema di leverismo sincronizzato consente apertura/chiusura simultanea delle chele.

Synchronized linkage system allows simultaneous opening/closing of the jaws.

Système de liaison synchronisé permet d'ouvrir/fermer simultanément les mâchoires.

Sistema de palancas sincronizadas permite apertura/cierre simultáneo de garras.

Synchronisierte Hebelsystem erlaubt das gleichzeitige Öffnen und Schließen der Zangen.

2

Protezione conica per preservare lo stelo cilindro durante la demolizione.

Conical shape shield to protect the cylinder rod during the demolition.

Protection conique du vérin pour préserver la tige lors de la démolition.

Protección cónica para preservar el vástago del cilindro durante la demolición.

Konischer Schutz zur Erhaltung der Kolbenstange während des Abbruchs.

3

Profilo chele ad alta penetrazione.



High penetration jaws profile.

Profil de mâchoires haute pénétration.

Perfil de garras de alta penetración.

Zangenprofil mit hoher Durchdringung.



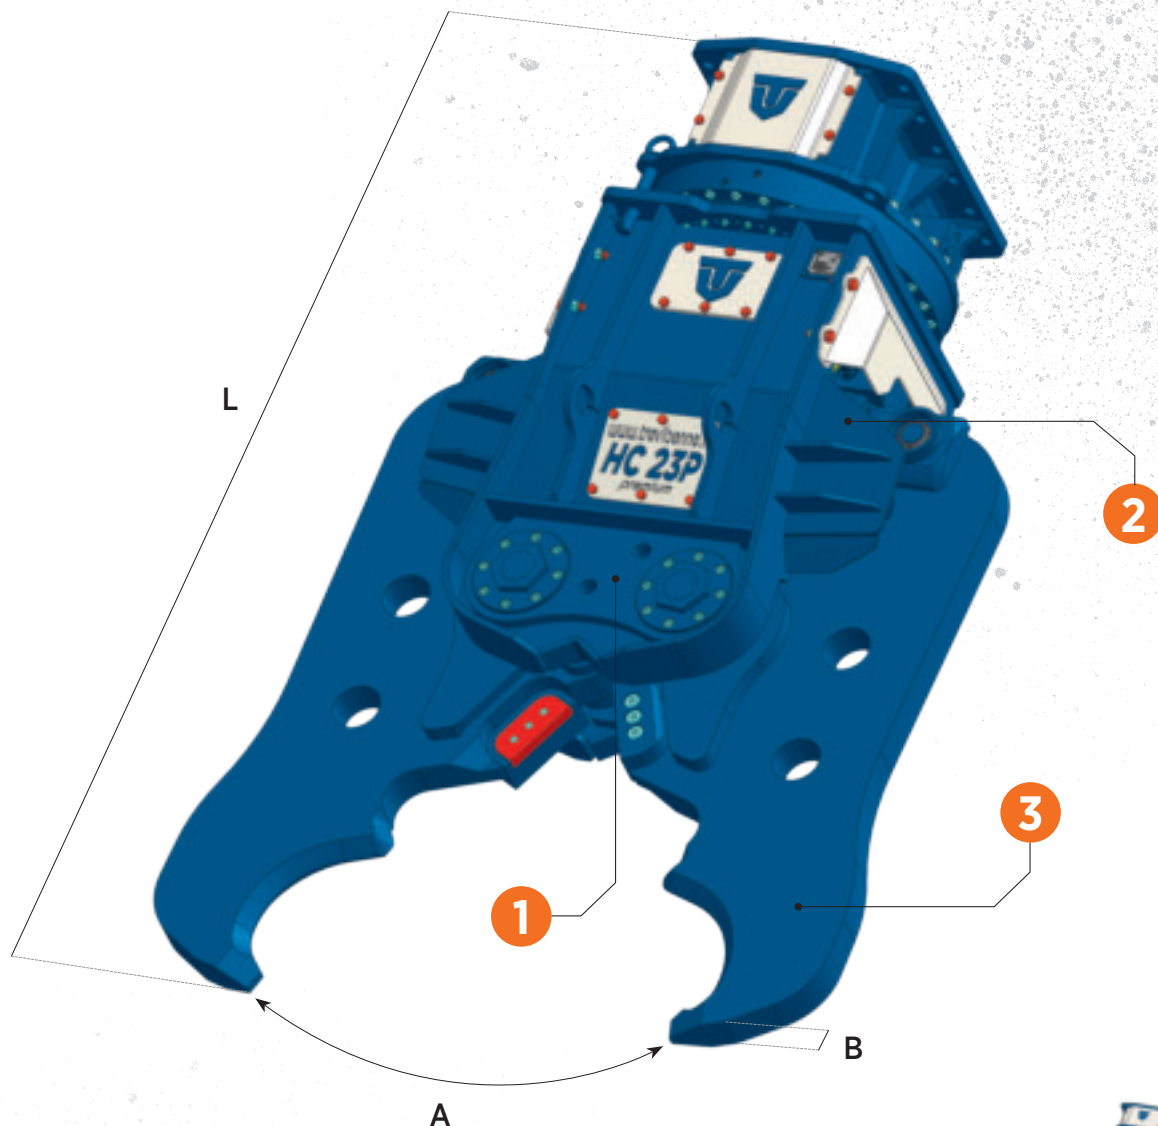

- (1) Accoppiamento escavatore-attrezzatura ottimale
Optimum excavator-equipment combination
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination
- (2) Accoppiamento escavatore-attrezzatura possibile
Possible excavator-equipment combination
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination

		HC 18P	HC 23P	HD 28P
	kg.	1.835	2.485	2.835
A	mm.	850	1.035	1.130
B	mm.	60	80	80
L	mm.	2.240	2.360	2.190
	mm.	150	180	210
	n°	1	1	2
Ø max	mm.	35	40	50
	bar	250	250	250
	l/min.	130 / 180	180 / 200	200 / 250
max	bar	140	140	140
	l/min.	20 / 40*	20 / 40*	25 / 50*

* Doppio motore / * Double motor / * Double moteur / * Doble motor / * Doppelmotor