

UNIVERSAL HYDRAULIC B-LOCK



Quick Coupler

The Universal Hydraulic Quick Coupler B-Lock has been designed and developed in order to comply fully the European regulation EN474. For this reason, the operator can work with the quick coupler safely avoiding the fall down and/or the oscillation of the equipment hooked in case of malfunction in the main pins locking system. This new security system has no any influence in terms of time during the operations of equipment change. The uniqueness of the coupler is that:

- front and rear pins are mechanically and independently locked;
- both locks are visible from machine cab;
- the release of the locks is fully automatic.



Optional: certified lifting hook

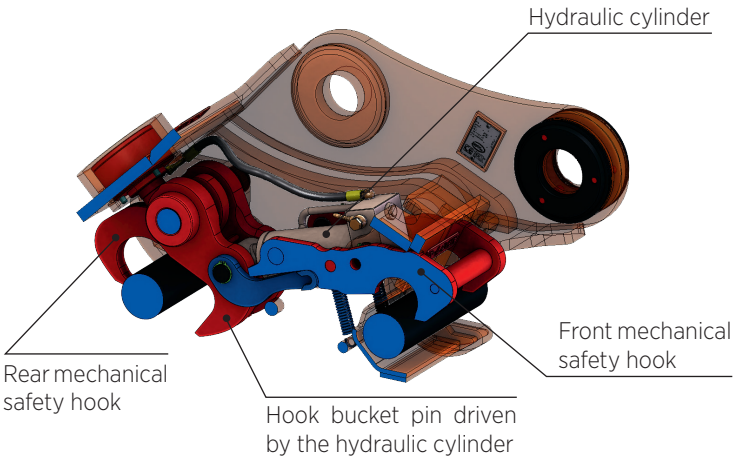

Code	Class	Model	 t.	 kg.
TARUI5055	T.50 - T.55	ARH 15	9,6 : 16	180 - 250
TARUI6060	T.60	ARH 20	16 : 19	230 - 270
TARUI6566	T.65 - T.66	ARH 25	19 : 26	250 - 350
TARUI6868	T.68	ARH 30	26 : 31	330 - 450
TARUI6970	T.69 - T.70	ARH 35	31 : 43	430 - 650
TARUI7575	T.75	ARH 40	43 : 55	630 - 850
TARUI8080	T.80	ARH 50	55 : 70	830 - 1200
TARUI8585	T.85	ARH 70	70 : 100	1150 - 1500

