




BENNA RINFORZATA per escavatori
REINFORCED BUCKET for excavators
GODET RENFORCE pour pelles
CAZO REFORZADO para excavadoras
VERSTÄRKTE TIEFLÖFFEL für Bagger



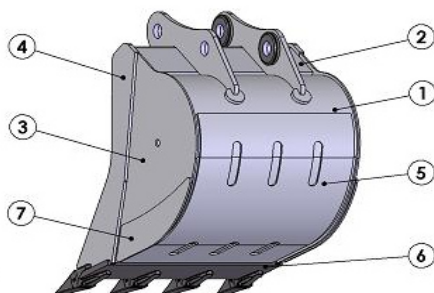


Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 300	Esco U25 S
T.55 12,5 - 16 ton	T55STR040	400	152	3	279	934	592	/	/
	T55STR050	500	214	3	305			/	/
	T55STR060	600	275	3	332			/	/
	T55STR070	700	346	4	372			/	/
	T55STR080	800	412	4	398			/	/
	T55STR100	1000	544	5	459			/	/
	T55STR110	1100	611	5	485			/	/
	T55STR120	1200	677	5	510			/	/
	T55STR130	1300	774	5	541			/	/
	T55STR140	1400	811	6	572			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	HB 400	S355	/
Spessore	Thickness	8 mm	12 mm	8 mm	20 mm	8 mm	270 x 32 mm	8 mm	/

Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 300	Esco U30 S
T.60 16 - 19 ton	T60STR040	400	182	3	338	1004	653	/	/
	T60STR050	500	252	3	370			/	/
	T60STR060	600	324	3	401			/	/
	T60STR070	700	410	4	454			/	/
	T60STR080	800	486	4	484			/	/
	T60STR100	1000	643	4	561			/	/
	T60STR110	1100	724	5	593			/	/
	T60STR120	1200	802	5	625			/	/
	T60STR130	1300	881	5	665			/	/
	T60STR140	1400	960	6	701			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	HB 400	S355	/
Spessore	Thickness	8 mm	18 mm	8 mm	20 mm	8 mm	270 x 32 mm	8 mm	/

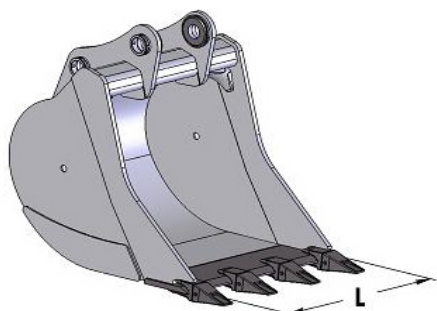

BENNA RINFORZATA per escavatori
REINFORCED BUCKET for excavators
GODET RENFORCE pour pelles
CAZO REFORZADO para excavadoras
VERSTÄRKTE TIEFLÖFFEL für Bagger


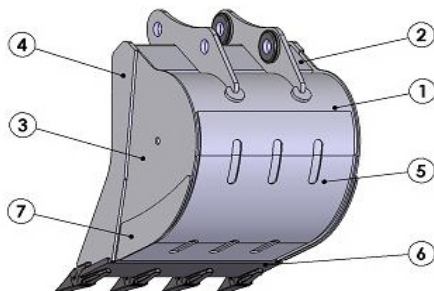
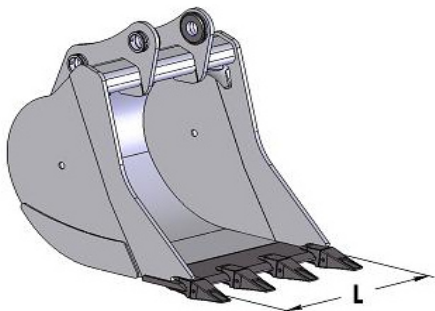


Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 350	Esco U30 S
T.65 19 - 23 ton	T65STR050	500	279	3	463	1088	714	/	/
	T65STR060	600	363	3	503			/	/
	T65STR070	700	450	3	543			/	/
	T65STR080	800	570	4	618			/	/
	T65STR100	1000	754	4	698			/	/
	T65STR120	1200	940	5	796			/	/
	T65STR130	1300	1034	5	836			/	/
	T65STR140	1400	1128	5	876			/	/
	T65STR150	1500	1221	6	927			/	/
	T65STR160	1600	1315	6	973			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	HB 400	S355	/
Spessore	Thickness	10 mm	18 mm	8 mm	25 mm	10 mm	300 x 35 mm	8 mm	/

Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 350	Esco U35 S
T.66 23 - 26 ton	T66STR050	500	320	3	515	1153	789	/	/
	T66STR060	600	415	3	557			/	/
	T66STR070	700	513	3	600			/	/
	T66STR080	800	653	4	678			/	/
	T66STR100	1000	862	4	763			/	/
	T66STR120	1200	1075	5	865			/	/
	T66STR130	1300	1183	5	907			/	/
	T66STR140	1400	1290	5	949			/	/
	T66STR150	1500	1398	5	1003			/	/
	T66STR160	1600	1505	6	1051			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	HB 400	S355	/
Spessore	Thickness	10 mm	18 mm	10 mm	25 mm	10 mm	300 x 35 mm	10 mm	/



BENNA RINFORZATA per escavatori
REINFORCED BUCKET for excavators
GODET RENFORCE pour pelles
CAZO REFORZADO para excavadoras
VERSTÄRKTE TIEFLÖFFEL für Bagger


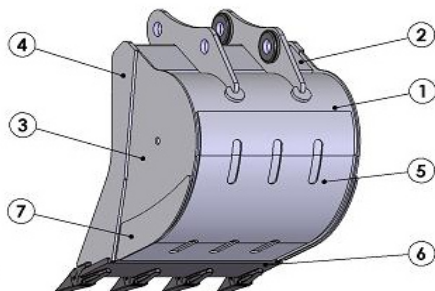
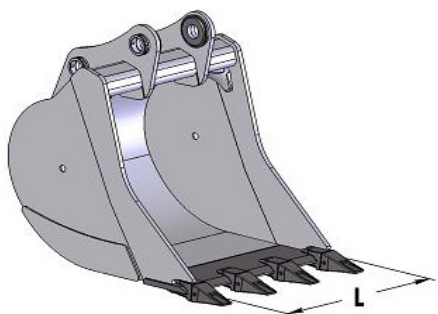


Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 400	Esco U35 S
T.68 26 - 31 ton	T68STR050	500	395	3	735	1251	903	/	/
	T68STR060	600	510	3	786			/	/
	T68STR070	700	620	3	838			/	/
	T68STR080	800	735	3	940			/	/
	T68STR100	1000	960	4	1042			/	/
	T68STR120	1200	1190	5	1179			/	/
	T68STR130	1300	1300	5	1231			/	/
	T68STR140	1400	1415	5	1282			/	/
	T68STR150	1500	1530	5	1333			/	/
	T68STR160	1600	1640	6	1417			/	/
	T68STR170	1700	1755	6	1468			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	HB 400	S355	/
Spessore	Thickness	10 mm	20 mm	10 mm	30 mm	10 mm	400 x 40 mm	12 mm	/

Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 400	Esco U35 S
T.69 31 - 38 ton	T69STR060	600	543	3	880	1300	940	/	/
	T69STR070	700	677	3	940			/	/
	T69STR080	800	835	4	1035			/	/
	T69STR100	1000	1108	4	1165			/	/
	T69STR120	1200	1391	5	1300			/	/
	T69STR130	1300	1535	5	1370			/	/
	T69STR140	1400	1680	5	1430			/	/
	T69STR150	1500	1825	5	1490			/	/
	T69STR160	1600	1970	6	1580			/	/
	T69STR180	1800	2260	6	1700			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	HB 400	S355	/
Spessore	Thickness	12 mm	20 mm	12 mm	30 mm	10 mm	400 x 40 mm	12 mm	/



BENNA RINFORZATA per escavatori
REINFORCED BUCKET for excavators
GODET RENFORCE pour pelles
CAZO REFORZADO para excavadoras
VERSTARKTE TIEFLÖFFEL für Bagger

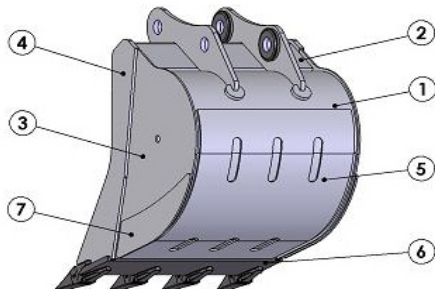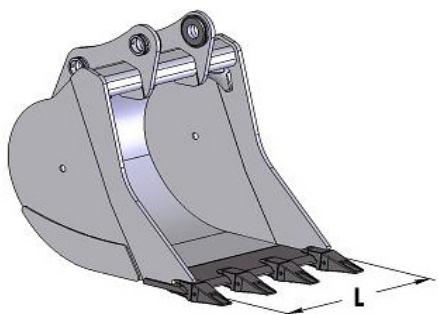

Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 460	Esco U40 S
T.70 38 - 43 ton	T70STR060	600	624	3	939	1360	963	/	/
	T70STR070	700	770	3	1003			/	/
	T70STR080	800	949	4	1101			/	/
	T70STR100	1000	1260	4	1242			/	/
	T70STR120	1200	1581	5	1389			/	/
	T70STR130	1300	1745	5	1467			/	/
	T70STR140	1400	1909	5	1530			/	/
	T70STR150	1500	2074	5	1594			/	/
	T70STR160	1600	2239	6	1689			/	/
	T70STR170	1700	2405	6	1756			/	/
	T70STR180	1800	2569	6	1815			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	HB 400	S355	/
Spessore	Thickness	12 mm	20 mm	12 mm	30 mm	12 mm	400 x 40 mm	12 mm	/

Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	Tipo Denti - Teeth Type €	
								CAT J 460	Esco U45 S
T.75 43 - 55 ton	T75STR115	1200	1515	4	1836	1505	1100	/	/
	T75STR135	1400	1835	4	2004			/	/
	T75STR145	1500	1995	5	2115			/	/
	T75STR155	1600	2155	5	2199			/	/
	T75STR165	1700	2310	5	2283			/	/
	T75STR175	1800	2470	5	2363			/	/
	T75STR195	2000	2800	6	2531			/	/
	T75STR215	2200	3110	6	2730			/	/
		1	2	3	4	5	6	7	8
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	Hardox 400	S355	/
Spessore	Thickness	12 mm	25 mm	12 mm	40 mm	15 mm	400 x 50 mm	12 mm	/

